

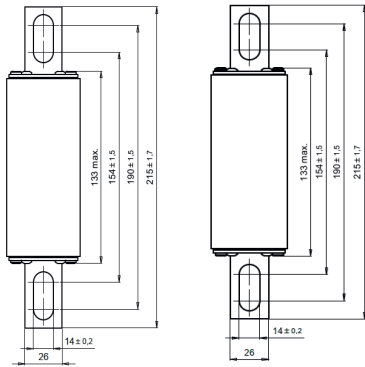


DC 1500 V



SQB-DC151

 **usE180276**



90 445 38

90 445 39



90 446 39

Verpackungseinheit / Packing unit: 1 Stück / 1 pieces

Betriebsklasse / Class
aBat/aR

IEC 60269-7
UL 248-13

Bemessungs- spannung	Artikel Nr.	Größe	Bemessungsstrom	max. Anzugsmoment
Rated Voltage	Article No	Size	Rated Current	Tightening torque:
V				Nm
DC 1500	90 445 38	SQB-DC 151	200-630	48
	90 445 39			
	90 446 39			

Bemessungsausschaltvermögen / Rated breaking capacity:

260 kA@ DC 1500 V (L/R = 3 ms)


Bemessungsstrom Rated Current	Artikel Nr. Article No.			Gewicht Weight	Bemessungs- spannung Rated Voltage	Schmelz- integral Pre-Arcing- I ² t-Value	Ausschalt- integral Total I ² t-Value	Leistungs- abgabe Power Loss
	ohne Klapp- melder without indicator	mit Klappmelder with indicator	mit Mitten- Mikroschalter-Adapter für Meldeschalter with central microswitch adapter for microswitch					
A				kg / 1	V	A ² s	A ² s	W
200	90 445 38.200	90 445 39.200	90 446 39.200	1,00	DC 1500	11.800	71.000	60
250	90 445 38.250	90 445 39.250	90 446 39.250	1,00	DC 1500	20.000	120.000	70
315	90 445 38.315	90 445 39.315	90 446 39.315	1,00	DC 1500	38.000	230.000	80
350	90 445 38.350	90 445 39.350	90 446 39.350	1,00	DC 1500	52.000	315.000	90
400	90 445 38.400	90 445 39.400	90 446 39.400	1,00	DC 1500	77.000	460.000	95
450	90 445 38.450	90 445 39.450	90 446 39.450	1,00	DC 1500	106.000	640.000	100
500	90 445 38.500	90 445 39.500	90 446 39.500	1,00	DC 1500	137.000	820.000	110
550	90 445 38.550	90 445 39.550	90 446 39.550	1,00	DC 1500	190.000	1140.000	120
630	90 445 38.630	90 445 39.630	90 446 39.630	1,00	DC 1500	272.000	1630.000	155

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen [hier zum Download](#) / for more information [download here](#))

a	A2	B1 max.	B2	Cf3
130	0,6	1,25	0,6	0,8

DC 1500 V

SQB-DC151

 usE180276

Zeit/Strom-
 Kennlinien
 Time-current
 characteristics

