
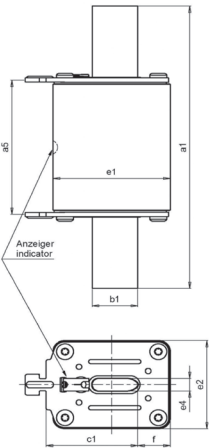


**DC 1000 V NH1**

 **Listed**  
E341342



Verpackungseinheit / Packing unit: 3 Stück / 3 pieces

Betriebsklasse / Class gPV	IEC 60 269-6 UL 248-19 VDE 0636-6
-------------------------------	---

Bemessungs- spannung Rated Voltage	Artikel Nr. Article No	Größe Size	Bemessungs- strom Rated Current	Länge Length								
				a5	a1	b1	e4	e1	e2	f	c1	
V			A	mm	mm	mm	mm	mm	mm	mm	mm	
DC 1000	20 556 29	NH1	63-200	65	135	20	6	51,5	42	14	40	

Bemessungsausschaltvermögen / Rated breaking capacity **30 kA DC 1000 V**  
(L/R=2 ms)

Bemessungsstrom Rated Current	Artikel Nr. Article No.	Gewicht Weight	Bemessungs- spannung Rated Voltage	Schmelzintegral Pre-Arcing-I <sup>2</sup> t-Value	Ausschaltintegral Total I <sup>2</sup> t-Value @ DC 1000 V (L/R = 2 ms)	Leistungs- abgabe Power Loss
A		kg / 1	V	A <sup>2</sup> s	A <sup>2</sup> s	W
63	20 556 29.63	0,5	DC 1000	414	1.500	14
80	20 556 29.80	0,5	DC 1000	740	2.600	17
100	20 556 29.100	0,5	DC 1000	1.700	6.000	19
125	20 556 29.125	0,5	DC 1000	3.700	13.000	21
160	20 556 29.160	0,5	DC 1000	5.600	19.600	27
200	20 556 29.200	0,5	DC 1000	9.900	30.300	32

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen [hier zum Download](#) / for more information [download here](#))

a	A2	B1 max.	B2	Cf3
130	0,8	1,25	0,5	0,8

**DC 1000 V NH1** 

Zeit/Strom-  
Kennlinien  
Time-current  
characteristics

