


**DC 1000 V NH 2**

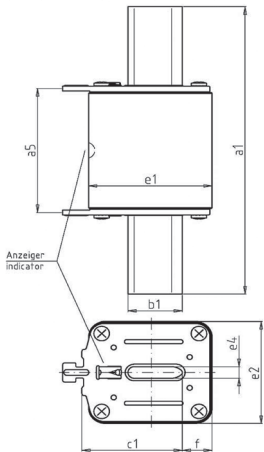

Verpackungseinheit / Packing unit: 3 Stück / 3 pieces

Betriebsklasse / Class gPV	IEC 60 269-6 VDE 0636-6 acc. UL 248-19
-------------------------------	--

Bemessungs- spannung Rated Voltage	Artikel Nr. Article No	Größe Size	Bemessungs- strom Rated Current	Länge Length								
				a <sub>5</sub>	a <sub>1</sub>	b <sub>1</sub>	e <sub>4</sub>	e <sub>1</sub>	e <sub>2</sub>	f	c <sub>1</sub>	
V			A	mm	mm	mm	mm	mm	mm	mm	mm	
DC 1000	20 557 29	NH2	200-250	65	150	26	6	59	53	14	48	

Bemessungsausschaltvermögen / Rated breaking capacity 30 kA DC 1000 V  
(L/R=2 ms)

Bemessungsstrom Rated Current	Artikel Nr. Article No.	Gewicht Weight	Bemessungs- spannung Rated Voltage	Schmelzintegral Pre-Arcing-I <sup>2</sup> t-Value	Ausschaltintegral Total I <sup>2</sup> t-Value @ DC 1000 V (L/R=2 ms)	Leistungs- abgabe Power Loss
A		kg / 1	V	A <sup>2</sup> s	A <sup>2</sup> s	W
200	20 557 29.200	0,7	DC 1000	10.400	39.000	31
250	20 557 29.250	0,7	DC 1000	23.700	78.000	36

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen <a href="#">hier zum Download</a> / for more information <a href="#">download here</a> )					
a	A2	B1 max.	B2	Cf3	
130	0,8	1,25	0,5	0,8	

**DC 1000 V NH 2**

Zeit/Strom-  
Kennlinien  
Time-current  
characteristics

